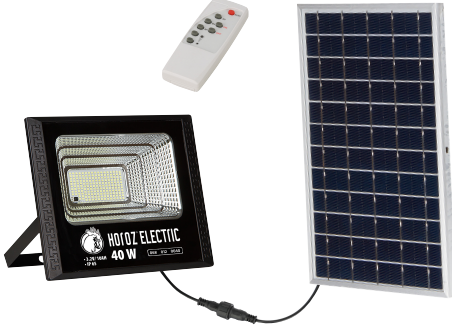
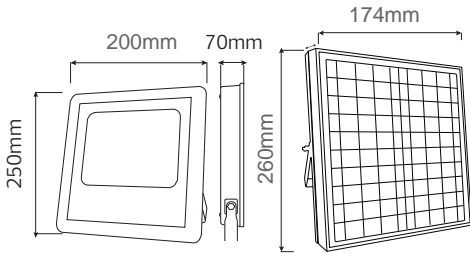


# LED SOLAR PROJECTOR


Product&amp;Family Code: 068 012 0040

**TIGER-40**

**BLACK**

## Technical Drawing

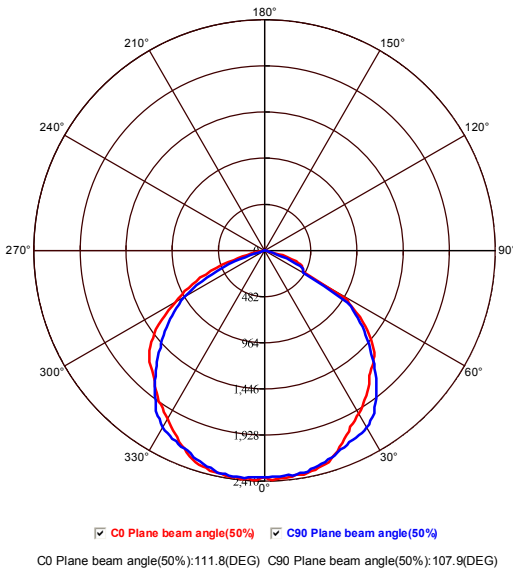

## Photometric Diagram



## Technical Data

Voltage (V)	3.2V 3Ah Lihtium Iron Phosphate
Product Wattage (W)	40
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	6400K
Materials	ABS
Protection Class	III
Dimmable	No
EEI	-
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	840
Charging Time (h) :	4-6 (Cloudy 1 day, Rainy 2 days)
Duration Time (hrs) ⏴	12-15H
Solar Panel	6V/6W(Polysilicon)
IP Rating	65
Beam Angle	120°
Remote Control	12m
Installation Height(m)	3-4
Charging&Discharging Time:	> 1500

## Applications

- Outdoor applications.



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Plastic Body

